


Mapping to BPEL4WS 1.1 Sample

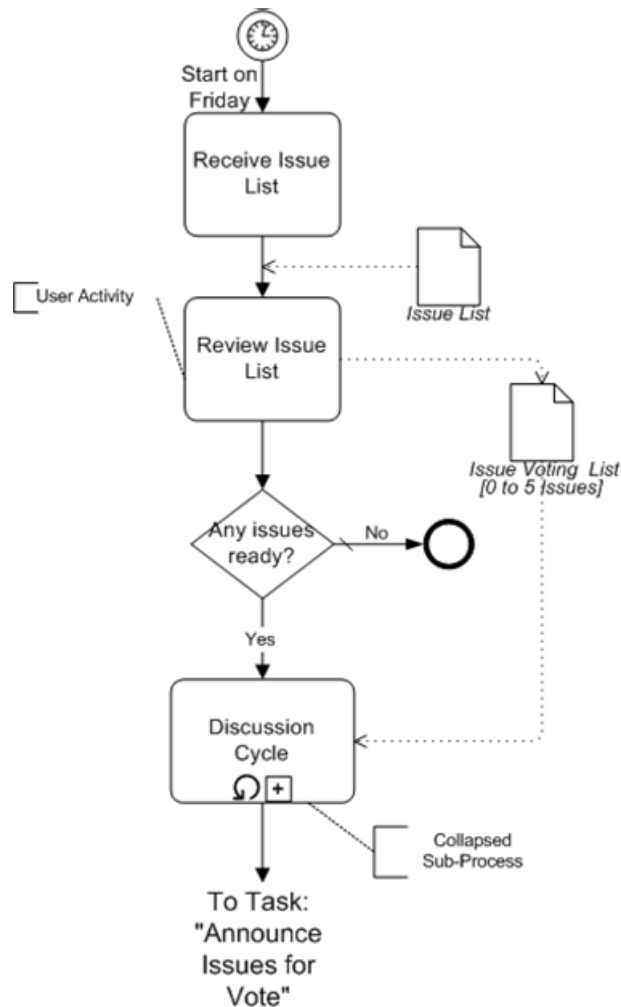

```

<process name="EmailVotingProcess">
  <!-- The Process data is defined first-->
  <sequence>
    <receive partnerLink="Internal" portType="tns:processPort"
      operation="receiveIssueList" variable="processData"
      createInstance="Yes"/>
    <invoke name="ReviewIssueList" partnerLink="Internal"
      portType="tns:internalPort" operation="sendIssueList"
      inputVariable="processData" outputVariable="processData"/>
    <switch name="Anyissuesready">
      <!-- name="Yes" -->
      <case condition="bpws:getVariableProperty(ProcessData,NumIssues)>0">
        <invoke name="DiscussionCycle" partnerLink="Internal"
          portType="tns:processPort" operation="callDiscussionCycle"
          inputVariable="processData"/>
        <!-- Other Activities not shown -->
      <!--name="No" -->
      </case>
      <otherwise>
        <empty/>
      </otherwise>
    </switch>
  </sequence>
</process>
  
```